


Communication Port Expansion Card

The Communication Port Expansion Card provides additional 4 parallel RS485 port and an additional RS232 port for the S1000 Controller. Up to 3 of these expansion cards can be installed on an S1000 Controller, allowing easier cabling termination for setting up multiple devices.

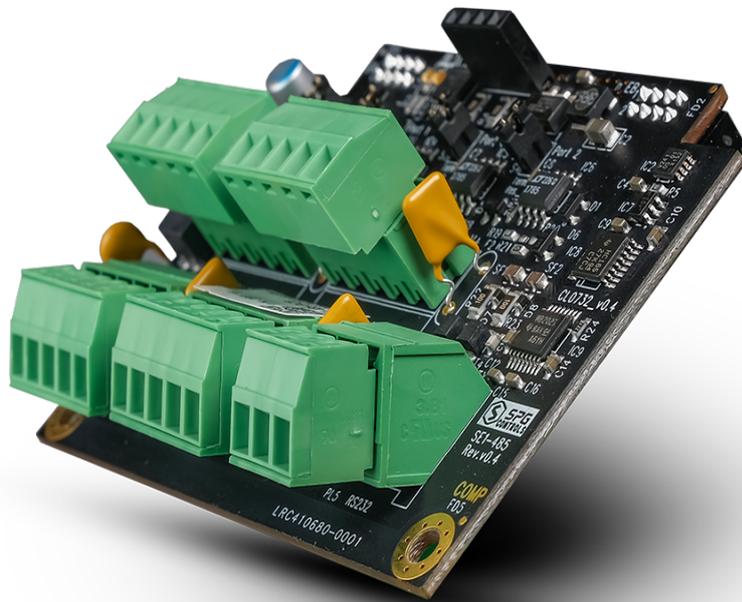

FEATURES

- Supports 4x RS485 ports
- Supports 1x RS232 port
- Separate resettable fuse
- Automatically detected by the S1000 Controller

TECHNICAL SPECIFICATIONS

Physical	
Dimensions	80mm x 56mm (3.1" x 2.2")
Packed weight	50g (1.8oz)
Environmental	
Operating temperature	-10°C (14°F) to 70°C (158°F) UL 294: -10°C (14°F) to 49°C (120.2°F)
Maximum humidity	5% (0°C or 32°F) to 95% (40°C or 104°F)
Electrical	
Power consumption	Idle 25mA at 12VDC Peak 450mA at 12VDC
Ports	
RS485	4
RS232	1
Miscellaneous	
Resettable fuse	Separate for each of the 4x RS485 bus power feeds 0.5A at 10VDC to 16VDC

COMPLIANCE

RoHS, RCM, FCC, CE, UL 294

ORDERING INFORMATION

PART NO.	TYPE CODE	DESCRIPTION
320 200 118	SE1-485	Communication Port Expansion Card